

ISSPRO Pyrometers

| Pyrometers Head Size | Sweep | Temp Degrees | Head Only | Head with 6ft Kit | Head with 10ft Kit | Head with 14ft Kit |
|-------------------------------------|-------|--------------|-----------|-------------------|--------------------|--------------------|
| 2" | 100° | 800° C | R605C | R605C-6 | R605C-10 | R605C-14 |
| 2" | 250° | 1000° C | R607C | R607C-6 | R607C-10 | R607C-14 |
| 2 3/4" | 100° | 1000° C | R602C | R602C-6 | R602C-10 | R602C-14 |
| 3" | 100° | 1000° C | R604IC | R604IC-6 | R604IC-10 | R604IC-14 |
| 3" | 250° | 1000° C | R606C | R606C-6 | R606C-10 | R606-14 |
| 3" Turbocater Pyro with Boost Gauge | | | | R609C (Head Only) | | |



R607C



R604C



R605C



R609C

ISSPRO Pyrometer Leads & Thermocouples



| |
|--------------|
| Thermocouple |
| R650 |



| 6ft Leadwire | 10ft Leadwire | 14ft Leadwire | 16ft Leadwire | 20ft Leadwire | 30ft Leadwire |
|---------------|----------------|----------------|----------------|----------------|----------------|
| R660-6 | R660-10 | R660-14 | R660-16 | R660-20 | R660-30 |


| |
|--------------------------|
| Weld Bush 1/4" N.P.T. |
| R680 |



Adjustable & High Temp
Versions available on request.

ISSPRO Coolant Senders

| Sender | Probe Length | Part # |
|---------------------|--------------|---------------|
| Coolant Probe Short | 2" | R1220S |
| Coolant Probe Long | 3" | R1220L |

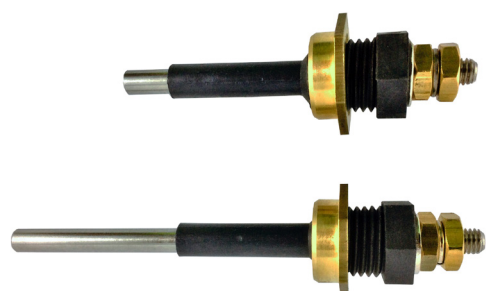


ISSPRO Pressure / Vacuum Gauges

| Gauge Type | Gauge Head | | 0-15 PSI | 0-50PSI | 0-100 PSI | 0-150 PSI |
|-----------------------|------------|--------------|--------------|--------------|--------------|--------------|
| Turbo Boost | 2" | | | R8603 | | |
| Oil Pressure Eng | 2" | | | R9002 | R9001 | |
| Oil Pressure Axle | 2" | | | | | |
| Oil Pressure Tube Kit | 16' | R7172 | | | | |
| Air Pressure | 2" | | | | | R9005 |
| Vacuum | 2" | | | | | |
| Manifold Pressure | 2" | R9010 | R9011 | | | |

ISSPRO Piezo Alarms

| Part # | Description | Voltage |
|--------------|-------------------|---------------|
| R7074 | Earitator 130 DBA | 12 - 24 Volts |

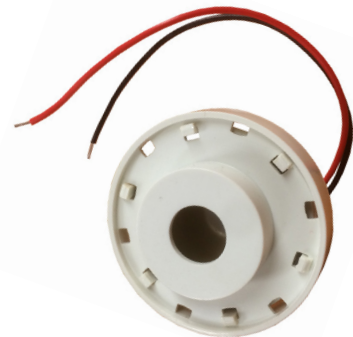

EARITATOR Audible Warnings


| Part # | Description | Voltage |
|----------------|-----------------------------|--------------|
| SAH | Earitator | 5 - 35 Volts |
| 7001056 | Earitator w/- Variable Dial | 5 - 35 Volts |



ENM Hourmeters

| Gauge Type | Head | Part # |
|---------------------------------------|------|----------------|
| 10V - 80V Hourmeter | 2" | 7001738 |
| Vibration Activated Hourmeter (T56C1) | | 7001879 |

ENM
Counting Instruments

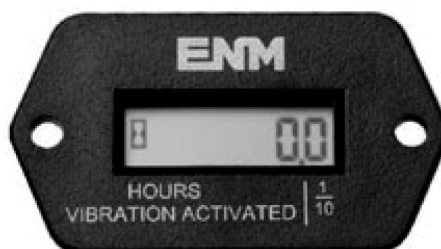

(T56C1) No Wiring required unit works on the vibrations from the engine. 8 Year + Battery Life. Totally Sealed. Made in USA